

DUAL BAND GIGABIT

HF-R2104T-W-1200M

SUPPORT
**5G
SIM**



Hardware Specification

Standards	IEEE802.3, IEEE802.3u, IEEE802.3ab
Interface	1*10/100/1000Mbps WAN port; 3*10/100/1000Mbps LAN ports;
Antenna	5*6dBi external antennas
Button	1* WPS/Reset button, 1*WiFi ON/OFF
Power	Input : 100-240V—50/60Hz, 0.2A Output : DC 12V1A
Dimensions	8.66 * 5.57 * 1.93 in (220*141.5*49mm)
LED Indicator	Sys*1, WAN*1, LAN*1, WiFi/WPS*1



An ISO 9001:2008 Certified Company

Gigabit Ports for Maximum Optical Fiber Bandwidth Utilization

The HF-R2104T-W-1200M is a high-performance WiFi router equipped with full Gigabit WAN and LAN ports, eliminating wired speed bottlenecks and allowing you to fully leverage the increasing bandwidth of your optical fiber connection.

1200M

Enhanced Gaming and Streaming Performance

Powered by a 1 GHz CPU built on a 28 nm process, the HF-R2104T-W-1200M delivers outstanding data processing efficiency while optimizing energy consumption. It seamlessly supports optical fiber connections with bandwidth options of 50M, 100M, 200M, and even up to 1000M, ensuring a smooth and lag-free experience for HD video streaming and gaming.



Hifocus router




1GHz

76%

Increase CPU frequency



Other router

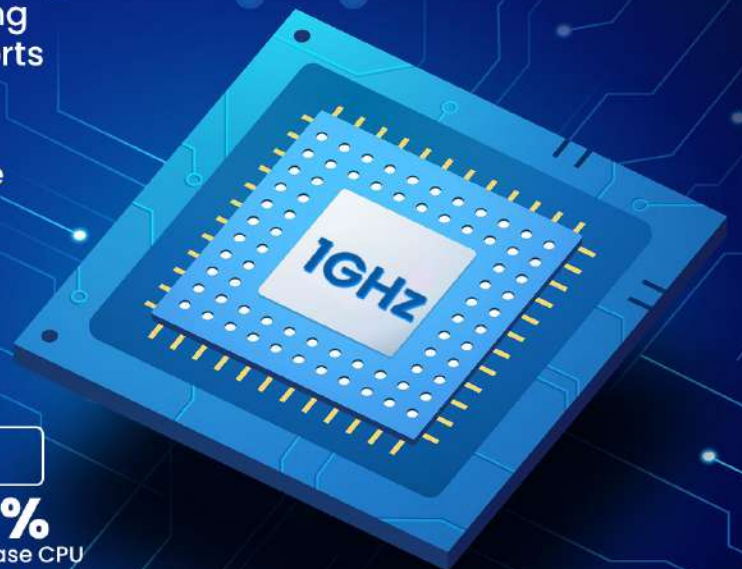



Hassle-Free Setup with Automatic Configuration

Forget your PPPoE username or password? Unable to access the router's web UI for setup? The HF-R2104T-W-1200M simplifies the process by automatically transferring your PPPoE credentials from your previous router, ensuring a seamless and stress-free setup.



5*6dBi External Antennas for Stronger WiFi Coverage

Equipped with 5*6dBi external dual-band antennas and advanced Beamforming technology, the HF-R2104T-W-1200M focuses WiFi signals directly toward connected devices, ensuring enhanced coverage and a more stable, high-performance wireless experience.

Specifications:

Wireless Features

Wireless Standards	IEEE 802.11ac wave2/a/n 5GHz IEEE 802.11b/g/n 2.4GHz
Data Rate	5GHz: Up to 866Mbps 2.4GHz: Up to 300Mbps
Frequency	2.400-2.4835GHz 5.150-5.250GHz
Transmit Power	CE: <20dBm(2.4G) <23dBm(5G)
EIRP Power (Max)	2.400-2.4835GHz:19.86dBm (EIRP) 5.150-5.250GHz:22.96dBm (EIRP)
Basic Features	SSID Broadcast: Enable/Disable; Transmission Power: high, medium, low Beamforming MU-MIMO
wireless Security	WPA-PSK/WPA2-PSK, WPA/WPA2; Wireless Security: Enable/Disable; WPS(WiFi Protected Set-up) fast encryption

Software Features

Internet Connection Type	PPPoE, Dynamic IP, Static IP PPPoE(Russia), PPTP(Russia), L2TP(Russia)
Operating Mode	Wireless Router Mode Universal Repeater Mode WISP Mode
DHCP Server	DHCP Server DHCP Client List DHCP Reservation



An ISO 9001:2008 Certified Company

Virtual Server

Port Forwarding

DMZ Host

UPnP

Security

Client Filter

Parental Control(support black list and white list)

Remote Web Management

Firewall

Forbid WAN PING from internet

DDNS

Support DynDNS, Oray.com, 88ip

VPN

IPsec pass through

PPTP pass through

L2TP pass through

Special Features

Smart Traffic Prioritisation

PPPoE Username/password Clone

Smart WiFi Schedule

Smart Power Saving

Smart LED on/off

Others

Bandwidth Control

Guest Network

IPTV

MAC Clone

Static Routing

System Log

Backup & Restore configurations

Firmware upgrade online

Firmware upgradeable via browser

Supports IPv6



An ISO 9001:2008 Certified Company

Others

Temperature

Operating Temperature: 0 °C ~ 40 °C;
Storage Temperature: -40 °C ~ 70 °C.

Humidity

Operating Humidity: 10% ~ 90% RH non-condensing;
Storage Humidity: 5% ~ 90% RH non-condensing.



An ISO 9001:2008 Certified Company